

# NA LIGHT PRO 600

**ADA**  
aqua design amano  
aqua design amano co., ltd.  
8554-1 Urushiyama, Nishikan-ku,  
Niigata 953-0054, Japan  
MADE IN CHINA  
406307S14OUTEC26C10

## ●Safety Instruction

※To prevent electric shock, injury and any other serious accidents, read the following instructions carefully before use.

○Product specifications are subject to change without notice. Please check our website for the latest information.

## ⚠ WARNING

- Do not disassemble nor modify this product. It may cause fire, electric shock or malfunction of the product.
- Do not use this product if accidentally dropped on the floor. It may cause fire, electric shock or malfunction.
- This product is for indoor use only. It cannot be used outdoors. Do not install this product in humid or dusty places even indoors.
- Do not use this product in an environment other than its operating environment temperature specified in this instruction manual. Do not use this product in a place where the product is directly exposed to sunlight, water, rain, wind, frequent vibration, or in high humidity. It may cause fire, electric shock or malfunction.
- Avoid water. It may cause electric shock or malfunction. Stop using the product immediately if the product gets wet.
- Never touch the power source with wet hands. It may cause electric shock.
- Do not cover the Control Unit and AC adapter with any flammable materials, including a cloth or paper. Do not use this product near flammable materials. It may cause fire.
- Do not insert any metals or flammable materials inside this product. It may cause fire, electric shock or malfunction.
- Do not damage the cord insulation with a sharp object, such as knife. Damaged insulation may result in a short circuit, electrical shock, and/or fire.
- ADA will not be responsible for damage to the product resulting from such causes as improper installation, use, modification of the product, and/or connecting to an incompatible power source.
- Do not forcefully bend, twist, or pull the Power Supply Cord. If the Power Supply Cord is damaged, it may cause fire or electric shock.
- Stop using this product immediately if the Power Supply Cord is damaged (exposed cable core, disconnection of the cord etc.) It may cause fire or electric shock.
- Keep the Control Unit, AC adapter, power source and the Power Plug away from water. It may cause fire or electric shock. In case of using an electrical outlet located below the aquarium, keep the Power Supply Cord running under the AC adapter and Power Plug.
- Do not look directly into the LED light.
- To prevent electric shock and injury, KEEP OUT OF REACH OF CHILDREN.
- Aquarium Use Only.
- Be sure to connect the AC adapter to the Control Unit after the power plug has been unplugged for some time. There is a risk of sparks flying if the product is plugged or unplugged while current is flowing.

## ⚠ CAUTION

- Be cautious not to drop or submerge this product into water.
- Keep the Lighting Unit, Control Unit, AC adapter, and Power Supply Plug away from water. This product is not waterproofed.
- Do not leave the Lighting Unit directly on the floor or any places other than an aquarium tank during use.
- Do not use this product with a dimmer. Dimming must be performed from the application.
- The Lighting Unit becomes hot due to heat radiation during use. It is not a malfunction.
- The Lighting Unit, Control Unit, and AC adapter become very hot during lighting period and will remain hot for some time after the light is turned off. Wait until they cool off before handling them. Never touch the top surface (radiation fin) and ballast of the Lighting Unit until they cool down since they can become extremely hot.
- LED light of the Lighting Unit is not replaceable.
- Do not use any kind of adhesive tape on this product nor expose the product to direct sunlight. It may cause discoloration or deterioration.
- Do not use this product in places with poor electrical connections. It may cause flickering light or black out.
- Do not use this product near a radio or television. It may cause noise problems.
- Do not pull the Power Supply Cord when unplugging. Always hold the AC adapter or Power Plug when unplugging.
- Always unplug the Power Plug before maintenance.
- If you experience any issues with the product, contact your local ADA distributors. If you need to send the product to a distributor, pack the product properly to avoid damage during transportation.
- The supplied Power Supply Cord is designed exclusively for the AC adapter of this product. Be sure to use the supplied Power Supply Cord for the AC adapter. Never use the product in any other combination than this, as doing so may cause accidents or malfunctions. In addition, never use the supplied Power Supply Cord for any other products.
- The illumination intensity of this product can be adjusted using the dedicated application. The durability of the components may be reduced if the product is continuously illuminated at the maximum illuminance.
- Dust accumulation between the heat radiation fins on the top surface of the Lighting Unit causes heat buildup and shortens the lifespan of the LEDs. Use a heat radiation fin cleaning brush periodically to remove dust.
- Because the body of the Lighting Unit and the legs are made of different materials, there may be differences in color in the finished product.
- Do not apply excessive force to the legs of the Lighting Unit. Doing so may leave a gap and prevent proper installation of the Lighting Unit in the aquarium.
- When the color tone or light intensity changes, the Control Unit or AC adapter may emit an operating noise or high-frequency sound, which is not abnormal.
- If the Lighting Unit is splashed with water, liquid fertilizer, or additive, wipe it off immediately with a soft, dry cloth to prevent rusting or other damage.


## 1. Product Features of NA LIGHT PRO 600

NA LIGHT PRO 600 is a LED lighting system for aquatic plants with special RGB LED chips adopted to the light source. In the initial mode, because each wavelength output of the three primary colors of light, such as red (R), green (G), and blue (B) is optimized for planted aquariums, healthy aquatic plants grow, and it enables to achieve colorful and beautiful aquascapes. In addition, various controls, such as dimming and timer settings, can be performed by using ADA Controller, the dedicated application. The newly adopted soft lighting mode allows gentle control of not only turning the light on but also turning the light off.


### Compatible Aquarium Tanks:

CUBE GARDEN W600 x D300 x H250 (mm) Glass thickness 5mm  
CUBE GARDEN W600 x D300 x H360 (mm) Glass thickness 6mm  
CUBE GARDEN W600 x D300 x H450 (mm) Glass thickness 6mm  
CUBE GARDEN W600 x D450 x H360 (mm) Glass thickness 6mm

The legs of the Lighting Unit are installed in a way that it hangs on the outside of the aquarium. Therefore, the product can be installed to a W600 aquarium regardless of the thickness of the glass.

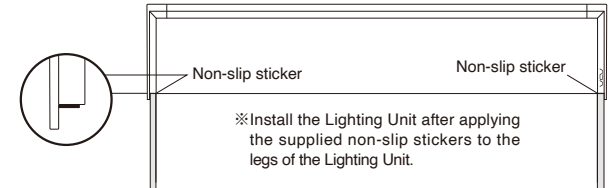

## 2. Names of Product Parts

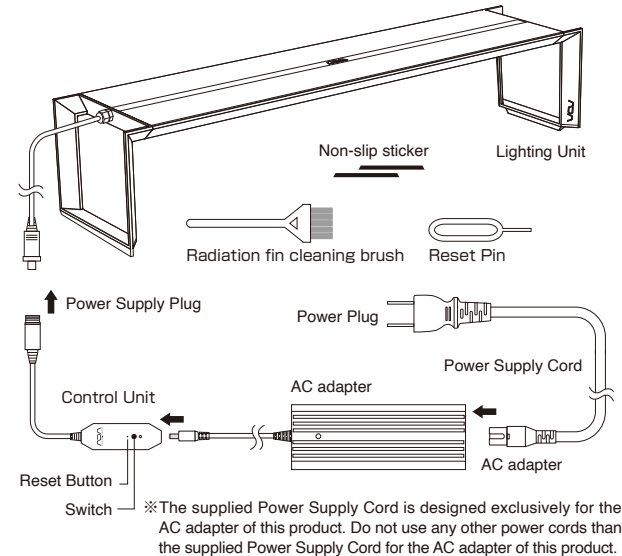

## 4. Product Specification

|                             |                                                                                                                                    |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Input voltage               | AC100 - 240V 50/60Hz                                                                                                               |
| Rated Power                 | 108W                                                                                                                               |
| Power consumption           | 0 to 66W                                                                                                                           |
| Illuminance                 | 0 to 40,000Lux ±10% (Central illuminance at 10cm)                                                                                  |
| Color temperature           | Default setting mode approx. Around 8,000 -11,000K (Due to the nature of LED lighting, there are variations in color temperature.) |
| LED                         | RGB LED x 70                                                                                                                       |
| LED lifespan                | Over 30,000hrs (subject to operating environment)                                                                                  |
| Operating temperature range | 0 - 35°C                                                                                                                           |

※Please note that the lifespan of each electronic component, including the AC adapter, may be shortened depending on the operating environment (voltage, temperature, installation location) and lighting time.

※We recommend replacing the AC adapter after 5 years of use.

## 3. Usage

### [Without using the dedicated application]

- Install the Lighting Unit with Non-slip stickers on the compatible Cube Garden as shown in the figure.
- Be cautious not to drop or submerge the unit into the water during installation.
- Connect the Control Unit and AC adapter to the Lighting Unit. Connect the Power Supply Cord to the AC adapter, plug the Power Plug into the electrical outlet, and turn the switch ON to turn the light on. To turn off the light, turn the switch OFF.

### [With the ADA Controller application]

- ① Download the ADA Controller to your smartphone or tablet.
- ② Connect the Control Unit and AC adapter to the Lighting Unit.
- ③ Connect the Power Supply Cord to the AC adapter, plug the Power Plug into the electrical outlet, and turn the switch on.
- ④ Open the ADA Controller to connect to the product and make various settings. For details on how to use the application, refer to the application video.

\*Press down the Reset Button on the Control Unit using the Reset Pin for at least 5 seconds and then release it to return to the initial mode.

### [ADA Controller (the application) download]



### [Application video]



# NA LIGHT PRO 600

**ADA**  
aqua design amano  
aqua design amano co., ltd.  
8554-1 Urushiyama, Nishikan-ku,  
Niigata 953-0054, Japan  
MADE IN CHINA  
406307S14OUTEC26C10

## ●安全注意事项

※在使用本产品前，请仔细阅读以下注意事项。不遵守以下注意事项的话，有可能会发生触电、火灾或烧伤等重大事故。

○产品规格如有变更，恕不另行通知，敬请谅解。最新信息请参阅本公司官方网站。

### ⚠ 警告

- 请绝对不要对产品进行分解、改造等。否则有可能造成火灾、触电、故障等事故的发生。
- 不慎将本产品掉落在地面上等，使灯体受到剧烈撞击后，请停止使用。否则有可能造成火灾、触电、故障等事故的发生。
- 请在室内使用本产品。请一定不要在室外使用。即使是在室内，也不要安装在湿度高，灰尘多的地方。
- 请不要在产品使用环境温度规定以外的情况下使用。此外，请不要使用于阳光直射的地方、湿度极高的地方、有振动的地方或直接与水、雨、风相接触的地方。否则有可能发生火灾、触电、故障等事故。
- 使用时请注意不要使产品沾到水。否则有可能发生触电、故障等事故。产品沾到水后，请停止使用。
- 请绝对不要用湿手插入或拔出电源插头。否则有触电的危险。
- 请不要在产品上覆盖布或纸类等易燃物品。请不要在易燃物的周围使用本产品。否则有可能会引起火灾等事故发生。
- 请不要在产品的缝隙处插入金属类或易燃物。否则有可能发生火灾、触电、故障等事故。
- 电源线的绝缘部分，请一定要注意不要被刀具等尖锐物品划伤。绝缘线出现破损的话，会导致漏电、触电、火灾等事故发生。
- 由于产品安装或使用方法错误，或者由于改造产品、不正确的电源连接方式等原因导致的产品故障，不在弊社保修范围内。
- 严禁强行弯曲、拧、拉电源线。否则有可能导致电源线破损，引发火灾、触电等事故发生。
- 电源线损坏后（露出芯线、断线等情况），请立即停止使用。继续使用会导致火灾、触电等重大事故发生。
- 控制器，AC电源和电源插头等，如果沾水，可能导致火灾、漏电等事故发生。如果电源插板的位置低于鱼缸，请将连接后的电源线下垂，电源线最低的位置必须低于控制器，AC电源和电源插头。
- 在开灯的状态下，请一定不要直视LED灯。
- 请不要使用于孩子的手可以摸得到的地方。否则有触电、受伤的危险。
- 控制器与AC电源的连接与分开，必须在不通电的情况下进行。否则有打火花的可能。

### ⚠ 注意

- 请一定要注意本产品不要掉落在水中或沾到水等。
- 请一定不要让灯体、控制器，AC电源、电源插头等沾到水。本产品没有防水功能。
- 请不要把正在通电的灯体直接放在地上或其他位置。
- 本产品仅能通过专用APP调光。
- 通电时，灯体因为放热，表面温度较高。这是正常现象。
- 灯体、控制器及AC电源，在通电使用中和关闭电源后的短时间内，温度较高。请一定要等其完全冷却后，再进行相关操作，否则可能有烫伤的危险。特别是灯体表面（散热片）的温度很高。在冷却之前，请一定不要触摸。
- LED灯珠无法进行更换。
- 请不要在灯体上粘贴胶带或让阳光直射灯体。否则有变色或老化的危险。
- 请不要在电压不稳的场所使用。否则有可能导致灯光闪烁、灭灯的情况发生。
- 产品的周围请不要使用收音机、电视等产品。否则有可能会有杂音。
- 拔掉电源时，禁止直接拉电源线，请手持电源插头拔掉，以免造成产品损坏。
- 清洁时请一定拔掉电源。
- 如果产品需要修理，请与购买店联系。为了避免运输途中的损坏，请包装好再发。
- 本产品附带的电源线，是连接本产品AC电源的专用电源线。请一定要使用专用电源线连接AC电源。严禁使用本产品附带之外的电源线，否则有可能导致事故或产品故障的发生。此外，请一定不要用本产品中附带的电源线连接其他产品。
- 使用专用APP可以调光，改变照度。如果持续使用最大照度，产品的耐久性有降低的可能。
- 如果不及及时清除散热片间的灰尘，导致热量无法及时散出，会影响LED灯珠的使用寿命。请定期用散热片清洁刷清除堆积的灰尘。
- 灯体散热部位与灯体支架部位的材料不同，稍有色差，请理解。
- 请不要向灯体支架部位施加压力，否则灯体散热部位与支架部位产生缝隙，有可能无法正常安装在鱼缸上。
- 调节色调、亮度等时，控制器、AC电源等有可能发出高频音。这是正常现象。
- 如果水、液肥和添加剂等溅到灯体上，请立即用干燥柔软的布擦拭。否则会导致灯体生锈。

## 1. NA LIGHT PRO 600的特长


本产品是一款培育水草的专业LED照明器具。采用了特殊的RGB LED灯珠，初始设置的R（红）、G（绿）、B（蓝），这光的三原色的波长最适用于水草造景。不仅水草生长健康，颜色鲜艳，水景也更加美丽。使用名为“ADA CONTROLLER”的专用APP可以设定时间，调节光亮等，还可以设定缓开关模式。

适用于玻璃厚度为5mm的超白玻璃方形鱼缸W600×D300×H250 (mm)

适用于玻璃厚度为6mm的超白玻璃方形鱼缸W600×D300×H360 (mm)


适用于玻璃厚度为6mm的超白玻璃方形鱼缸W600×D300×H450 (mm)

适用于玻璃厚度为6mm的超白玻璃方形鱼缸W600×D450×H360 (mm)

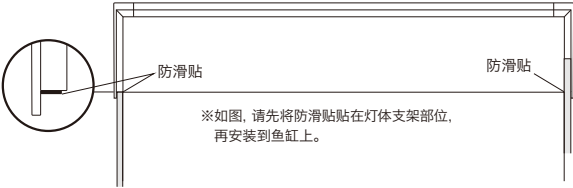

※如图，请先将防滑贴贴在灯体支架部位，再安装到鱼缸上。

## 2. 各部件名称

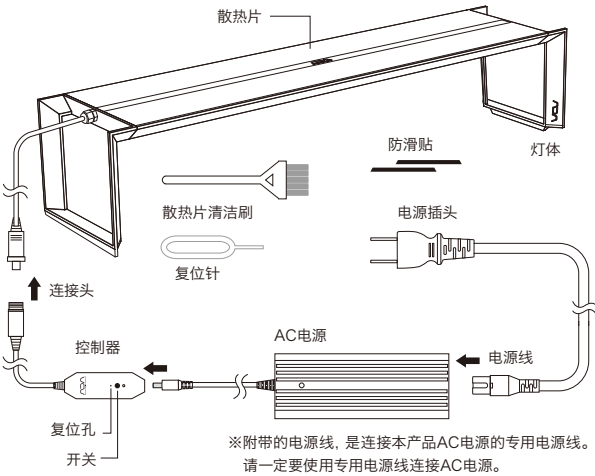

## 3.使用方法

- 贴好防滑贴后，将灯体直接放置适用的鱼缸上。
- 请注意不要掉落到鱼缸中。
- 连接灯体，控制器和AC电源。连接AC电源和电源线。插好电源插头后，将控制器上的按钮按下通电，LED灯亮起。再按一次开关，LED灯关闭。

专用APP的使用方法

- ①下载专用APP“ADA CONTROLLER”。
- ②打开灯的开关。关于APP的使用方法，请参照视频。
- ③打开APP，可以进行各种操作。
- ④将复位针插入复位孔长按5秒，可以回到初始设置。

【ADA CONTROLLER（APP）下载二维码】



【APP使用方法视频】



## 4.产品规格

|                 |                                        |
|-----------------|----------------------------------------|
| 电压              | AC100～240V 50／60Hz                     |
| 额定功率            | 108W                                   |
| 使用功率            | 0～66W                                  |
| 照度（距离10cm的垂直照度） | 0～40,000 Lux ±10%                      |
| 色温              | 初始设置约8,000～11,000K（因为LED的特征，色温会出现些许浮动） |
| LED             | RGB-LED 灯珠×70                          |
| LED寿命           | 30,000小时以上（根据使用情况可能出现变化）               |
| 使用环境温度          | 0～35℃                                  |

※请注意，包括AC适配器在内的各种电子部件，其使用寿命可能会因使用环境（电压、温度、安装位置）及点亮时长而缩短。  
※若您的AC适配器购买后使用达5年以上，建议您进行更换。