

4.使用上の注意

- アプリは常に最新のバージョンにアップデートして使用してください。
- パワーコード S-70は、周辺の温度0℃～40℃以内の場所でご使用ください。また、粉塵の多い場所・湿気が多い場所・直射日光の当たる場所・屋外など雨や水滴のかかる場所での使用も避けてください(換水時には特に注意してください)。

5.技術仕様


入力:100-125V 50/60Hz 15A
ACコンセント側:単一ACの最大負荷10A
4ACの最大負荷15A
125V
USB側 出力:5V ≒ 4.0A(合計)
5V ≒ 2.4A(単一)
サイズ:28×4.5×3cm(コード除く)
コード長:1.8m
Wi-Fi規格:IEEE802.11b/g, 2.4GHz
動作環境:
・IOS9以降またはAndroid4.1以降
・2.4GHz Wi-Fiネットワーク

3.Special features of Power Cord S-70

- ①Download Meross app on your smart phone.



- ②Plug the Power Cord S-70 into the outlet near a main Wi-Fi router.

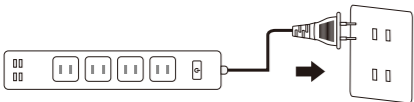

※Only the initial setting must be made near a main Wi-Fi router.
※Power Cord S-70 is compatible with only 2.4GHz.

- ③Open Meross app and set it up according to the installation guide.

- ④Plug Power Cord S-70 into an outlet again. It is not necessary to set up again.

※The timer function works only with Wi-Fi network used for the initial set up.
If not connected to Wi-Fi, the timer function will not start operating.

- ⑤Connect each equipment (lighting equipment, solenoid valve / EL-Valve, Mistflow etc.) to each specified set outlet.

- ⑥Set up the timer according to purposes using Meross app.

English

●Safety Precautions

※Please read carefully

⚠ Warnings

- Install the product to ornamental and rearing aquarium tanks for aquatic plants and tropical fish only according to the instruction manual. If installed uncertainly, it may cause fire, electric shock or personal injury.
- Because connection failure may result in fuming and ignition, never modify the power cord such as torsion connection etc.
- Do not forcibly bend, twist or pull the power cord. The cord might get damaged, and it may cause fire or electric shock.
- If continuing to use the product in abnormal conditions such as fuming or having strange odor, it may cause fire or electric shock.

⚠ Caution

- Do not repeatedly overload the power cord. Carefully choose its installation location not to step on the power cord.
- Do not use beyond the maximum power consumption. When using an extension cord with equipments with much power consumption, make sure to read instruction manuals of the equipments.
- Do not disassemble the product because it may cause malfunction or accident.
- When unplugging, make sure to hold the plug firmly and then unplug. If forcibly pulling the power cord, it may damage the cord and cause fire or electric shock.
- Make sure to firmly plug in, and be careful not to make it dusty.
- Do not handle the cord with wet hands. It may cause an electric shock.
- When cleaning, do not use water. It may cause fire or electric shock.
- KEEP OUT OF REACH OF CHILDREN

4.Special features of Power Cord S-70

- Always update the app to the newest version.
- Use Power Cord S-70 in a place where the ambient temperature is from 0℃~40℃. Avoid using in unsuitable places such as a dusty place, humid place, a place exposed to direct sun light or outdoor where exposed to rain or water drops (Pay close attention when changing water).


5.Technical Specification

Input: 100-125V 50/60Hz 15A
AC Outlet side: Maximum load of single AC: 10A
Maximum load for 4AC: 15A
125V
USB side output: 5V ≒ 4.0A (Total)
5V ≒ 2.4A (Single)
Size: 28x4.5x3cm (except the cord)
Length of the cord: 1.8m
Wi-Fi Standard: IEEE802.11b/g, 2.4GHz
Operating Environment:
・IOS 9 or Android 4.1 or later
・Wi-Fi network 2.4GHz


1.Special features of Power Cord S-70

- It is a smart power strip with built-in timer function suitable for Nature Aquarium, Aqua Terrarium and Paludarium (maximum capacity less than 1,500W). Including 4 electrical outlets (100V) and 4 USB ports (Type-A), timer for each power outlet can be controlled individually (All 4 USB ports can be controlled together). By using a special metal cover, the product can be safely used around aquarium tanks.
- By connecting to Wi-Fi, switching power ON/OFF and setting up timer can be controlled remotely.
- As for scheduling the timer, total 70 programs (routines) can be set.

■How to set the power strip to the special metal cover.

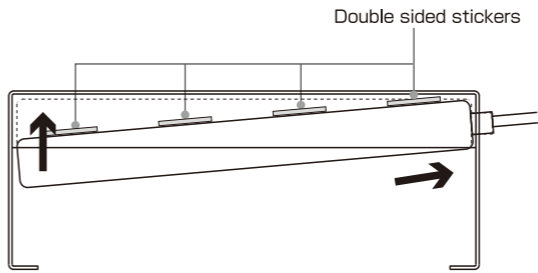

- Put the cord through a hole on the side of the special metal cover, and securely fix it as shown in the figure by putting supplied double sided stickers on the back of the power strip.
※The special metal cover comes with the Power Cord S-70 Cover Set.

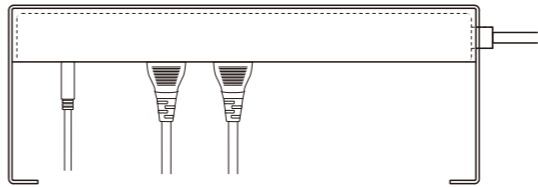

- By setting it to the special metal cover, the power strip can be installed downward. Therefore, it can prevent water from getting into the power outlets.

2.Special features of Power Cord S-70

- ①Power Button
Press the power button and turn on all the outlets and USB ports. If you press the power button again, it will be turned off.
If continue to hold down the power button until the status LED flashing in green (about 5 seconds), it will be reset to the factory setting.

- ②Status LED
Flashing slowly in green (1 per second): Setting mode
Flashing rapidly in green (2 per second): Initialization / Wi-Fi connection mode / Reset / Firmware upgrade
Lighting on in green: Connected successfully

- ③Outlet power LED
Light ON: Outlet power is ON.
Light OFF: Outlet power is OFF.

- ④USB power LED (Type-A)
Light ON: 4 USB ports are ON.
Light OFF: 4 USB ports are OFF.

