

ADA NATURE AQUARIUM

SOLAR RGB STAND for METAL CABINET 600

ソーラーRGB専用スタンド(メタルキャビネット600対応)

●安全上の注意

※必ずよくお読みください。



- 本製品をご使用になる前に、必ずこの説明書をよく読み、正しい使用方法を理解した上でご使用ください。正しい使用方法がわからないまままでのご使用は、絶対におやめください。
- この説明書は読み終わった後も大切に保管し、必要なときにお読みください。
- この製品は、ソーラーRGBⅡをつり下げるためのスタンドです。これ以外の目的には使用しないでください。
- 固定金具やボルト、コードクリップなどの鋭利な部分でけがをしないように、取り扱いには十分注意してください。
- ソーラーRGBⅡの使用説明書も必ずよくお読みください。
- お客様の取り扱い上の不注意で破損や事故などが起きた場合、弊社は一切の責任を負いませんのであらかじめご了承ください。
- 製品の仕様は予告なしに変更する場合があります。あらかじめご了承ください。なお、最新の情報は弊社ホームページにてご確認ください。
- 子どもの手の届かない場所で使用および保管してください。

※ウッドキャビネット、キューブキャビネットには対応していません。

●スタンドの設置

- 製品を使用する前に、下記の付属品がすべてそろっていることを確認してください。万一、不足している物や製品の破損が見つかった場合は、購入された販売店まですぐに連絡してください。
- 水槽台に固定金具をボルトで下の図のように固定します。固定金具は、水槽台の側面の内側に上下、ひとつずつ固定してください。
- 固定金具には、上用(穴が完全に貫通している)と下用(穴の下側に折り曲げ部がある)があります。下の図を参考に、上下の向きも確認してください。また、スタンドが垂直に立つように、上下の取り付け金具の位置が左右にずれないように注意してください。
- ボルトは、付属のスパナを用いて締め込んでください。1つの固定金具に対して必ず2本のボルト(大)とナットを使って、しっかりと固定してください。
- 固定金具の外側の穴に、スタンドを差し込みます。スタンドの向きを合わせ、ボルト(小)で固定します。ボルトは付属のスパナを用いて締め込んでください。

【付属品】ボルト(大)・ナット各4個、ボルト(小)2個、コードクリップ(大・小)各2個、スパナ2個

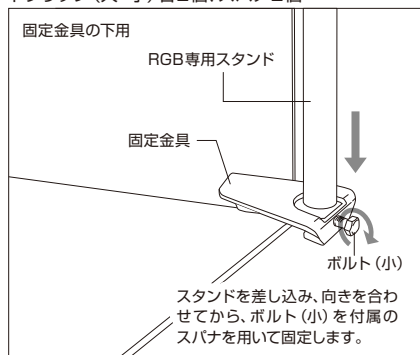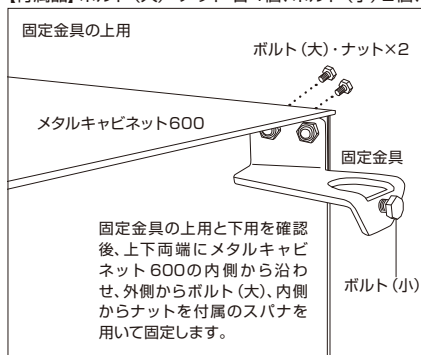

●照明器具の設置

※設置の前にソーラー RGBⅡの使用説明書をよくお読みください。


○スタンドにつり下げるため、照明器具のワイヤーに輪をつくりまします。輪の位置は、照明ユニットをつり下げる高さに応じてワイヤーの長さを調節してから、固定クランプのネジを六角レンチでしっかりと締めてください。

○スタンドに照明器具をつり下げます。ワイヤーの輪をスタンドに通し、適切な位置に掛けます。この時、照明器具を落としたり、水槽などにぶつけないように注意してください。

※地震のゆれなどによる落下を防ぐため、照明器具の位置を決めた後、ワイヤーの輪をしっかりと締めてください。

○照明器具のコードをコードクリップで固定します。コードクリップには大と小があります(大小各2個ずつ付属)。専用スタンドの縦の太い部分には大を、横の細い部分には小を使用します。


スタンドにワイヤーの輪をかける。

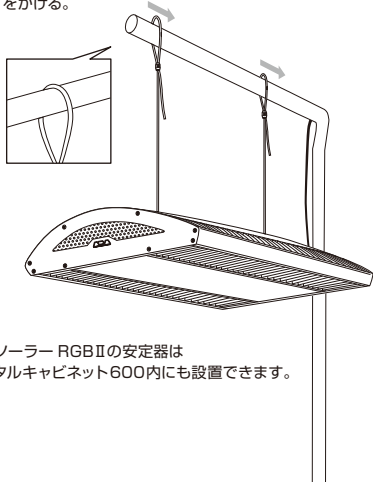

※ソーラー RGBⅡの安定器は
メタルキャビネット600内にも設置できます。

■背面から見た図(ソーラー RGBⅡの場合)

コードクリップ(小)

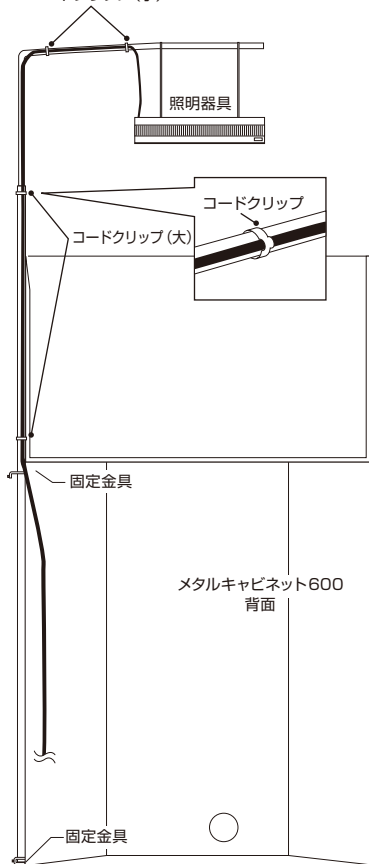

●使用上の注意

○錆などの原因になるので、専用スタンドや固定金具に水が掛かった場合にはすぐに乾いた布で拭き取ってください。

● Important Safety Instructions

※Please read carefully.



- Before the installation of this product, make sure to read this instruction manual carefully and understand all of its directions.
 - Please keep this instruction manual even after reading it and refer back to it when needed.
 - This product is designed specifically for hanging a SOLAR RGB II. Do not use this product for other purposes.
 - Handle brackets, bolts, and cord clips carefully to avoid injury caused by sharp edges.
 - Make sure to read the SOLAR RGB II installation manual thoroughly as well.
 - Please note that we will not be held any responsible for product damage or accidents that occur due to customer handling problems and not to follow each instruction.
 - Product specifications are subject to change without notice. Please check our website for the latest information.
 - KEEP OUT OF REACH OF CHILDREN
- ※ This product is not compatible with WOOD CABINET and CUBE CABINET.

● Installation

- Before using this product, make sure that the product has all the accessories listed below. If something is missing or the product is damaged, immediately contact your local ADA distributor.
- Install the mounting brackets to an aquarium cabinet using bolts as illustrated in the figures below. Fix the brackets to the inner side of the rear vertical ends on the side of METAL CABINET 600.
- There are an upper mounting bracket (a type with a hole completely penetrated) and a lower mounting bracket (a type with a bent part under the hole). Refer to the figures below and make sure to install the brackets in right directions. And to install the SOLAR RGB II Stand vertically, make sure both upper and lower brackets are securely installed without shifting off to the sides.
- Tighten bolts with an accessory spanner. Install each bracket securely with two bolts (large) and two nuts.
- Insert the stand into the outside hole of the brackets. Properly orient the stand and secure the stand with a bolt (small). Use an accessory spanner to tighten the bolts.

[Accessories]


Bolts(large) • Nuts 4 pcs each, Bolts (small) 2 pcs, Cord clips (large • small) 2 pcs each, Spanners 2pcs

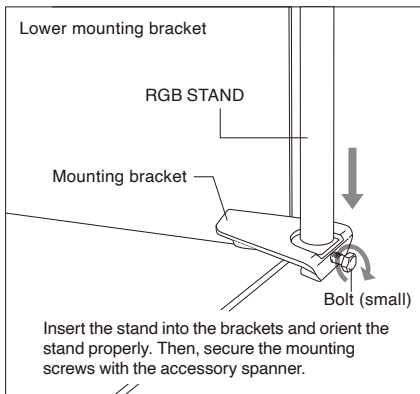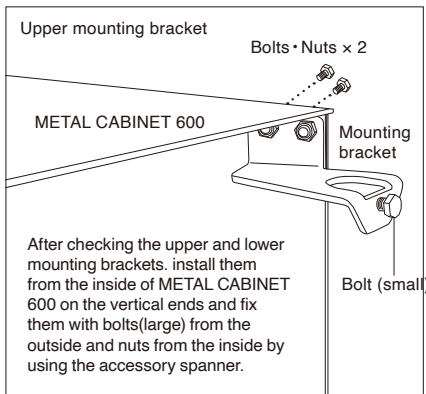


● Installing a Lighting Fixture

Read the SOLAR RGB II instruction manual thoroughly before this step.

- Make a loop with each of the two wires of the lighting fixture to mount the lighting fixture unit. Adjust the length of the wires according to the height of the lighting unit and tighten the wire clamps with a hex key wrench.
- Hang the lighting fixture on the stand. Place the loops over the arm of the stand and position the lighting fixture. Be careful not to drop the lighting fixture or bump it against the aquarium.
- * Tighten the loops after placing the lighting fixture in order to avoid falling by an earthquake.
- Secure the cords of the lighting fixture with cord clips. Two different sized cord clips are provided with the stand (two each of large and small clips). Use smaller cord clips on the slender horizontal arm of the stand and larger ones on the thick vertical section of the stand.

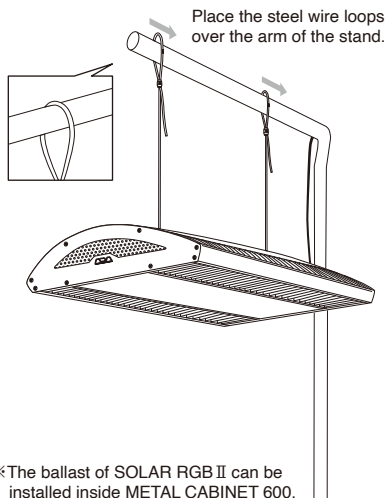

■ View from the back (SOLAR RGB II)

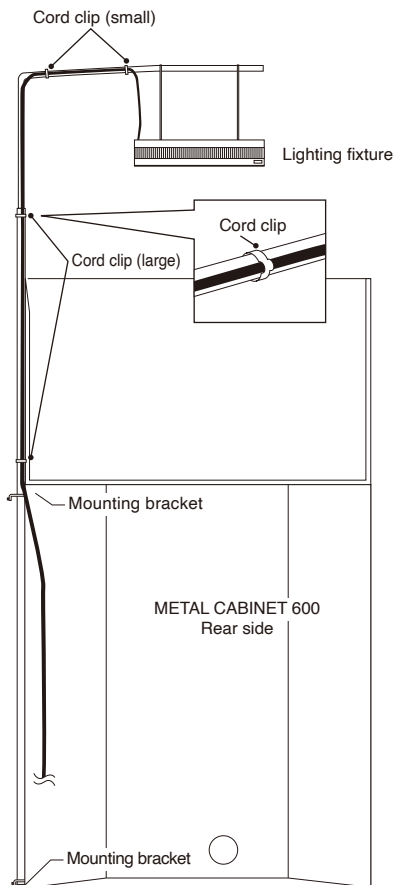

● Caution

- Wipe off any water splashed on the stand and mounting brackets with a dry cloth because water can cause rust on the stand.

ADA NATURE AQUARIUM

SOLAR RGB STAND for METAL CABINET 600

索拉RGB灯架（NA金属底柜 600专用）

●安全注意事项



※请一定阅读。

- 在使用本产品之前，请仔细阅读本说明书。请在理解了正确的使用方法后再使用。在不知道正确使用方法的情况下，严禁使用。
 - 在仔细阅读后妥善保存本说明书。有需要时再次阅读。
 - 本产品是专门用于悬挂索拉RGB II 的灯架。除此目的之外严禁使用。
 - 使用安装时，请小心不要被固定件、螺丝、电源线固定夹等的尖锐部位刮伤。
 - 请事先阅读索拉RGB II 的使用说明书。
 - 若因客户使用不当导致损坏或发生事故，本公司概不负责，敬请谅解。
 - 产品规格如有变更，恕不另行通知，敬请谅解。最新信息请参阅本公司官方网站。
 - 请妥善保存及使用在孩子的触碰不到的地方。
- ※无法与木制底柜、朴乐木制底柜、透明超白玻璃底柜配合使用。

●安装灯架

- 在使用产品之前，请先确认附属的配件是否齐全。万一有数量不足或配件破损的情况，请立刻与购买的店家联系。
- 如下图，用螺丝把固定件安装在底柜上。固定件的位置为底柜侧面的里面，上下各固定一个。
- 有固定件（上）（圆孔完全上下通透）和固定件（下）两种。请参考下图确认固定件的朝向。为了使灯杆垂直放置，请在安装固定件时注意不要左右有偏差。
- 请使用附属的扳手拧紧螺丝。固定一个固定件，必须使用2个长螺丝和螺母，牢固固定。
- 将灯杆插入固定件的圆孔，调整好灯杆的位置，使用短螺丝固定灯杆。使用附属的扳手拧紧螺丝。


【附属配件】长螺丝4个、螺母4个，短螺丝2个，电源线固定夹（大，小）各2个，扳手2个

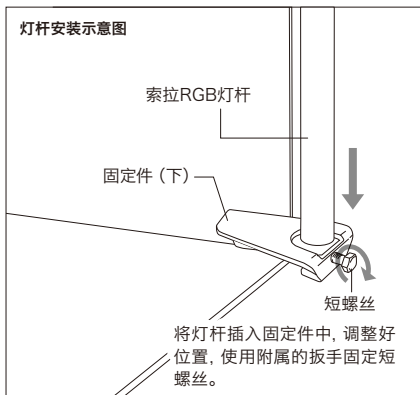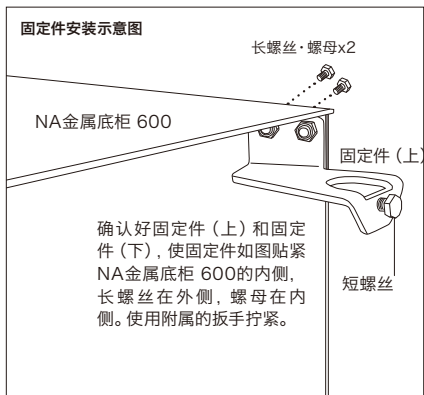

●安装照明灯具


※安装前请阅读索拉RGB II的使用说明书。

- 为了悬挂在灯架上，先将照明灯具上的吊线做出环状。根据照明灯具的高度调节吊线的长度，用六角扳手拧紧吊线锁的螺丝固定。
- 悬挂照明灯具。将环状的吊线穿到灯杆上，悬挂灯具至适当位置。此时请小心，注意不要让灯具掉落或碰撞鱼缸。
- ※为了防止地震晃动时，灯具掉落，请决定好灯具的位置后，请一定将吊线环固定紧。
- 照明设备的电源线请用电源线固定夹固定。固定夹有大小两种（每种各两个）。灯杆粗的部分用大固定夹，细的部分用小固定夹。

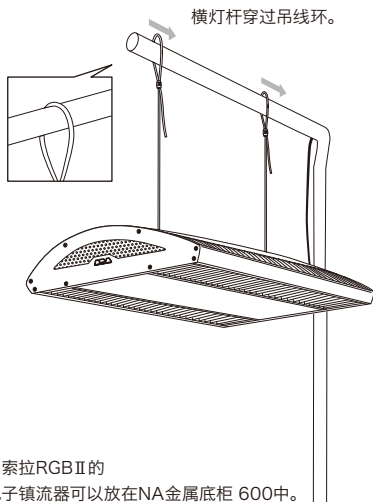

■从背面看（灯具为索拉RGB II）

电源线固定夹（小）

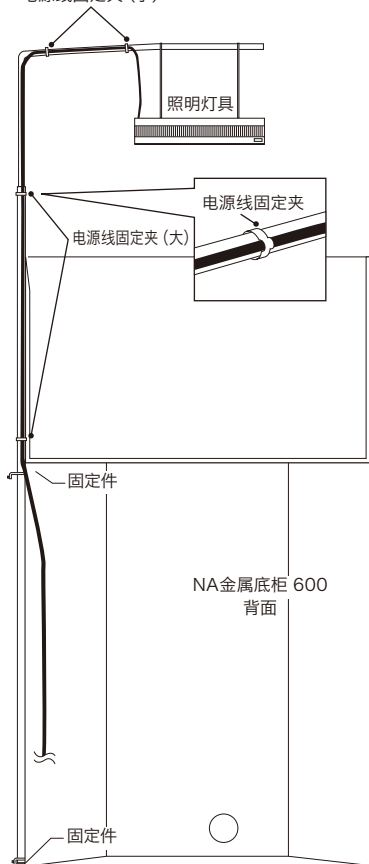

4.使用注意事项

- 灯架和固定件等如果溅到水后，请立即用干的布擦干，否则会生锈。

お問い合わせ先: ADAサービスセンター

E-mail/support@adana.co.jp

発売元: 株式会社 アクアデザインアmano

新潟県新潟市西蒲区漆山8554-1 〒953-0054

aqua design amano CO.,LTD.

8554-1 Urushiyama, Nishikan-ku, Niigata 953-0054, Japan

MADE IN JAPAN

408192S14COPYJEC25D10

