

ADA NATURE AQUARIUM

SOLAR-RGB STAND for METAL CABINET 60

ソーラーRGB専用スタンド(メタルキャビネット60対応)

●安全上の注意

※必ずよくお読みください。



- 製品をご使用になる前に、必ずこの説明書をよく読み、正しい使用方法を理解した上でご使用ください。正しい使用方法がわからないままでの使用は、絶対におやめください。
- この説明書は読み終わった後も大切に保管し、必要なときにお読みください。
- この製品は、ソーラーRGBをつり下げるためのスタンドです。これ以外の目的には使用しないでください。
- 固定金具やボルト、コードクリップなどの鋭利な部分でけがをしないように、取り扱いには十分注意してください。
- ソーラーRGBの使用説明書も必ずよくお読みください。

1.ソーラーRGB専用スタンドの特徴

- ソーラーRGBをつり下げることができるスマートなスタンドです。
 - 付属の固定金具は、メタルキャビネット60に固定することができます。
 - 別売のガーデンスタンド用取付金具を使用すると、ガーデンスタンドに設置することができます。
- ※ウッドキャビネット、プレーンキャビネットおよびキューブキャビネットには対応していません。

2.スタンドの設置


- 水槽台に固定金具をボルトで固定します。固定金具は、水槽台の側面の内側に上下、ひとつずつ固定してください。
- 固定金具には、上用(穴が完全に開いている)と下用(穴が完全に開いていない)があります。下の図を参考に、上下の向きも確認してください。また、スタンドが垂直に立つように、上下の取り付け金具の位置が左右にずれないように注意してください。
- ボルトは、適したサイズのスパナかレンチを用いて締め込んでください。1つの固定金具に対して必ず2本のボルト(小)を使って、しっかりと固定してください。
- 固定金具の外側の穴に、スタンドを差し込みます。スタンドの向きを合わせ、ボルト(大)で固定します。ボルトは、適したサイズのスパナかレンチを用いて締め込んでください。

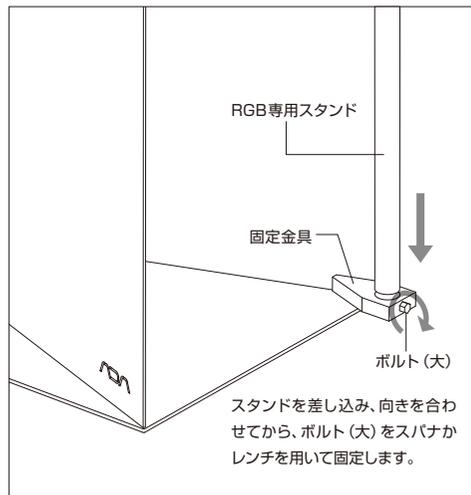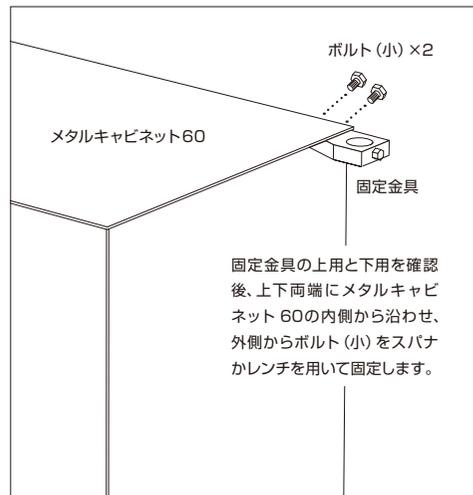


3.照明器具の設置

※設置の前にソーラーRGBの使用説明書をよくお読みください。

- スタンドにつり下げるため、照明器具のワイヤーに輪をつくります。輪の位置は、照明ユニットをつり下げる高さに応じてワイヤーの長さを調節してから、固定クランプのネジを六角レンチでしっかりと締めてください。
 - スタンドに照明器具をつり下げます。ワイヤーの輪をスタンドに通し、適切な位置に掛けます。この時、照明器具を落としたり、水槽などにぶつけないように注意してください。
- ※地震のゆれなどによる落下を防ぐため、照明器具の位置を決めた後、ワイヤーの輪をしっかりと締めてください。
- 照明器具のコードをコードクリップで固定します。コードクリップには大と小があります(大小各2個ずつ付属)。専用スタンドの縦の太い部分には大を、横の細い部分には小を使用します。

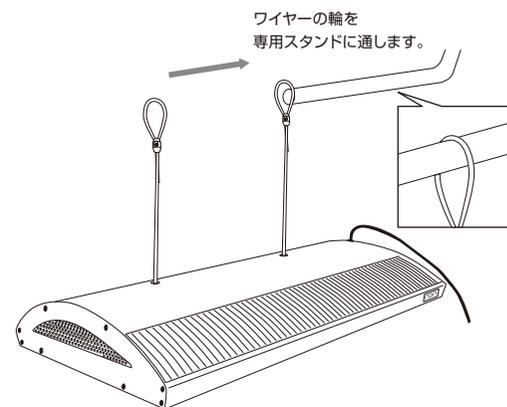

■背面から見た図(ソーラーRGBの場合)

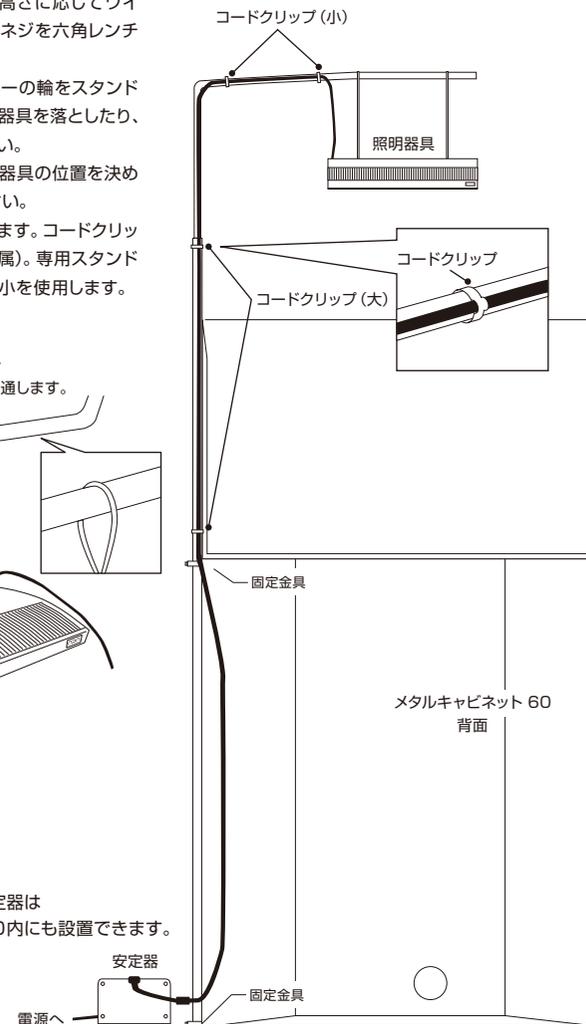

※ソーラーRGBの安定器はメタルキャビネット60内にも設置できます。

4.使用上の注意

- 錆などの原因になるので、専用スタンドや固定金具に水が掛かった場合にはすぐに乾いた布で拭き取ってください。

お問い合わせ先: ADAサービスセンター
0256-72-1994(平日10:30~17:30)
E-mail/support@adana.co.jp
408192S14COPYJEC20D24

発売元: 株式会社 アダデザインアム
新潟県新潟市西蒲区漆山8554-1 〒953-0054
MADE IN JAPAN

ADA
aqua design amano

ADA NATURE AQUARIUM SOLAR-RGB STAND for METAL CABINET 60

● Important Safety Instructions

※ Please read carefully



- Before the installation of this product, make sure to read this instruction manual carefully and understand all of its directions.
- Please keep this instruction manual even after reading it and refer back to it when needed.
- This product is designed specifically for hanging a SOLAR-RGB. Do not use this product for other purposes.
- Handle brackets, wood screws, and cord clips carefully to avoid injury caused by sharp edges.
- We recommend reading SOLAR-RGB installation manual thoroughly as well.
- KEEP OUT OF REACH OF CHILDREN

1. Features of SOLAR-RGB STAND

- The stylish stand is designed for supporting SOLAR-RGB Light fixture.
 - Accessory Mounting brackets can be fixed to Metal cabinet 60.
 - These stands can be installed on GARDEN STAND with a GARDEN STAND FITTING PART sold separately.
- ※ This product is not compatible with Wood Cabinet, Plain Cabinet and Cube Cabinet.

2. Installation


- Install the Mounting brackets to an aquarium stand using Mounting screws. Fix the brackets to the inner side of the rear vertical ends on the side of Metal Cabinet 60.
- There are two types of Mounting brackets. The top bracket has a completely penetrated hole, and the bottom bracket has a slight hollow. Refer to the figure below and make sure to install the brackets in right directions. And to install the RGB stand upright, make sure both top and bottom brackets are securely installed without shifting off to the sides.
- Tighten Mounting screws with a properly sized Hex wrench. Install each bracket securely with two Mounting screws.
- Insert the stand into the outside hole of the brackets. Properly orient the stand and secure the stand with a screw. Use a Hex wrench to tighten the screw.

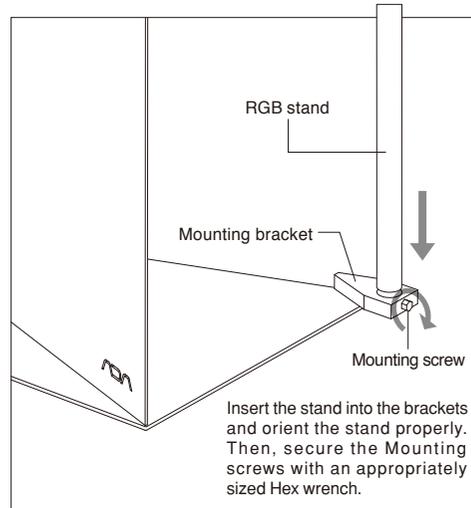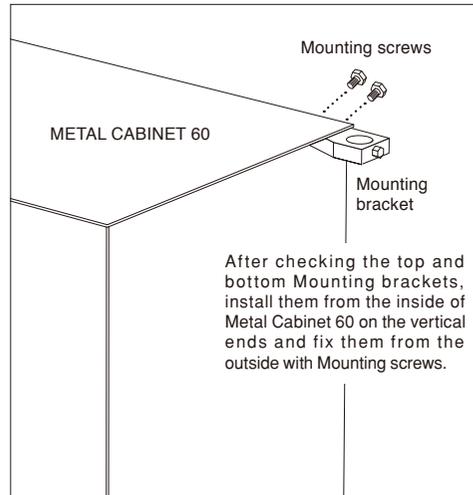


3. Installing a Light Fixture

Read SOLAR-RGB instruction manual thoroughly before this step.


- Make a loop with each of the two wires of the Light fixture to mount the Light fixture. Adjust the length of the wires according to the height of the lighting unit and tighten Wire clamps with the Hex key wrench.
 - Hang the Light fixture on the stand. Place the loops over the arm of the stand and position the Light fixture. Take care not to drop the Light fixture or bump it against the aquarium.
- *Tighten the loops after placing the Light fixture in order to avoid falling by an earthquake.
- Secure the cords of the Light fixture with Cord clips. Two different sized Cord clips are provided with the stand (two each of large and small clips). Use smaller Cord clips on the horizontal arm of the stand and larger ones on the vertical section of the stand.

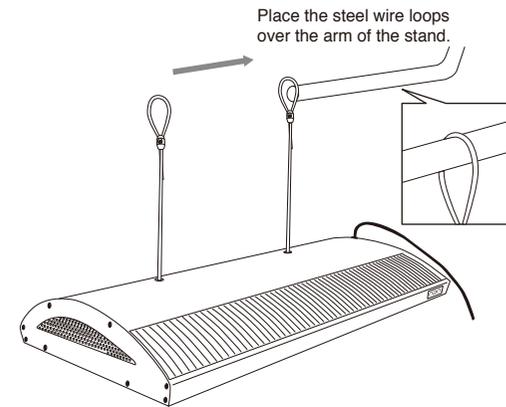

※ The ballast of Solar RGB can be installed inside Metal Cabinet 60.



■ View from the back (SOLAR-RGB)

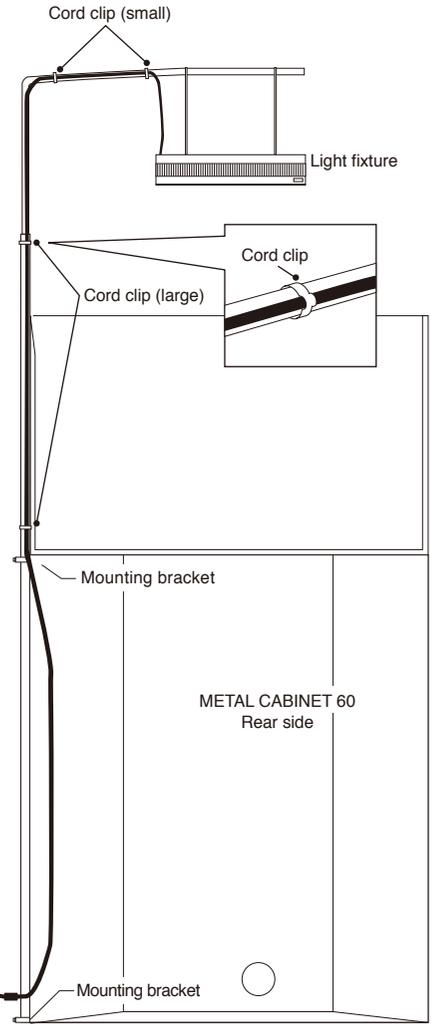

4. Caution

- Wipe off any water splashed on the stand or Mounting brackets with dry cloth since water can cause the stand to rust.

ADA NATURE AQUARIUM

SOLAR-RGB STAND for METAL CABINET 60

索拉RGB灯架(NA金属底柜 60专用)

●安全注意事项

※请一定阅读。



- 在使用本产品之前,请仔细阅读本说明书。请在理解了正确的使用方法后再进行使用。在不知道正确使用方法的的情况下,严禁使用。
- 在仔细阅读后妥善保存本说明书。有需要时再次阅读。
- 本产品是专门用于悬挂索拉RGB的灯架。除此目的之外严禁使用。
- 使用安装时,请小心,不要被连接固定件、螺丝钉、电线夹等的尖锐部位刮伤。
- 请事先阅读索拉RGB的使用说明书。

1.索拉RGB灯架的特征

- 用于悬挂索拉RGB的专用灯架。
- 附属的固定件可以把灯杆固定在NA金属底柜 60上。
- 使用另售的水族钢架用安装金属部件,也可以固定在水族钢架上。
- ※无法与木制底柜、朴乐木制底柜、透明超白玻璃底柜配合使用。

2.安装灯架

- 用螺丝把固定件安装在底柜上。固定件的位置为底柜侧面的里面,上下各固定一个。
- 有固定件(上)(圆孔完全上下通透)和固定件(下)(圆孔没有完全上下通透)两种。请参考下图确认固定件的朝向。为了使灯杆垂直放置,请在安装固定件时注意不要左右有偏差。
- 请使用大小合适的扳手拧紧螺丝。固定一个固定件,必须使用2个螺丝(小),牢固固定。
- 将灯杆插入固定件外侧的圆孔,调整好灯杆的位置,使用螺丝(大)固定。请使用大小合适的扳手拧紧螺丝。

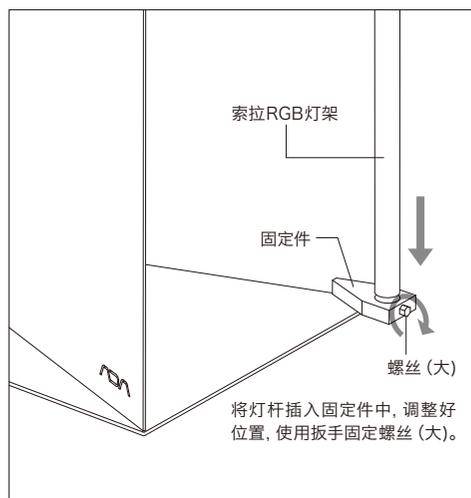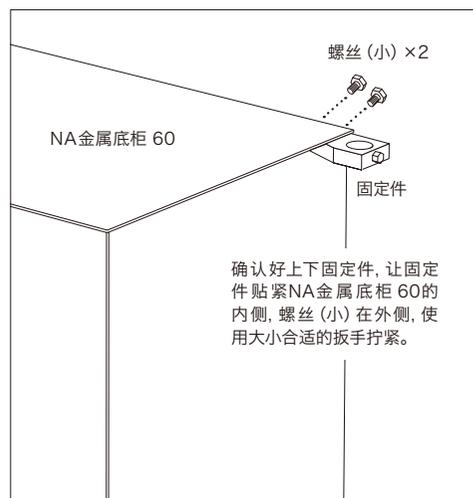


3.安装照明灯具

※安装前请阅读索拉RGB的使用说明书。

- 为了悬挂在灯架上,先将照明灯具上的吊线做出环状。根据照明灯具的高度调节吊线的长度,用六角扳手拧紧吊线锁的螺丝固定。
- 悬挂照明灯具。将环状的吊线穿到灯杆上,悬挂灯具至适当位置。此时请小心,注意不要让灯具掉落或碰撞鱼缸。
- ※为了防止地震晃动时,灯具掉落,请决定好灯具的位置后,请一定将吊线环固定紧。
- 照明设备的电源线请用电源线固定夹固定。固定夹有大小两种(每种各两个)。竖着的灯杆粗的部分用大固定夹,细的部分用小固定夹。

■从背面看(灯具为索拉RGB)

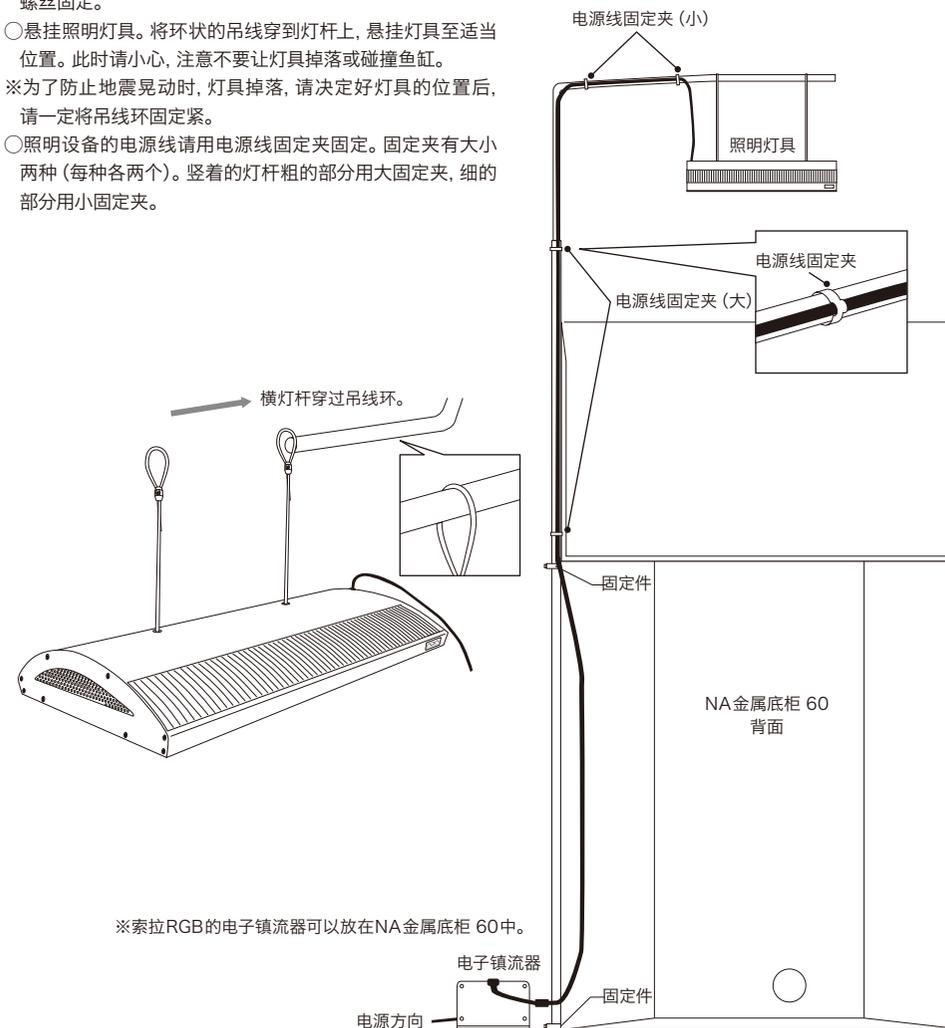

4.使用注意事项

- 灯架和固定件等如果溅到水后,请立即用干的布擦干,否则会生锈。